

## Pre-Rinse Units

**Application:** Deck mounted pre-rinse unit for hot and cold water.

**Body:** Cast brass with polished chrome plated finish.


**Valve Units:** WaterSaver self-contained renewable units with replaceable stainless steel seats and integral check valves. Check valves prevent cross-mixing of hot and cold water.

**Handles:** Forged brass four-arm handles with color-coded index discs.

**Pre-Rinse Assembly:** Self-closing squeeze valve with rubber-bound spray head, insulated handle and locking ring. Valve is mounted on spring loaded 39" stainless steel hose.

**Inlet:** 1 3/16" male shank with (2) 1/2" OD slipjoint connections. Furnished complete with locknut, washer and inlet fittings.

**Quality Assurance:** Pre-rinse unit is fully assembled and factory tested prior to shipment.

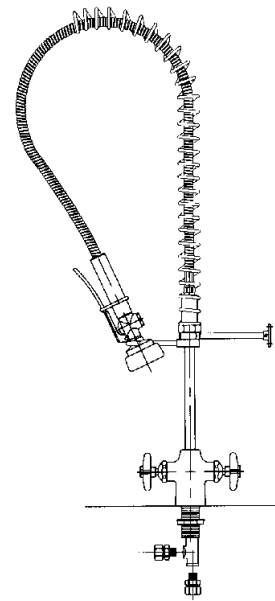

**PR411**

*Pre-Rinse Unit,  
Deck Mounted*

**Application:** Panel mounted pre-rinse unit for hot and cold water.

**Body:** Cast brass with polished chrome plated finish.


**Valve Units:** WaterSaver self-contained renewable units with replaceable stainless steel seats and integral check valves. Check valves prevent cross-mixing of hot and cold water.

**Handles:** Forged brass four-arm handles with color-coded index discs.

**Pre-Rinse Assembly:** Self-closing squeeze valve with rubber-bound spray head, insulated handle and locking ring. Valve is mounted on spring loaded 39" stainless steel hose.

**Inlet:** 3/8" IPS female union inlets. Furnished complete with mounting shanks, locknuts and washers. *If mounting shanks are to be assembled, use suffix "WSA".*

**Quality Assurance:** Pre-rinse unit is fully assembled and factory tested prior to shipment.

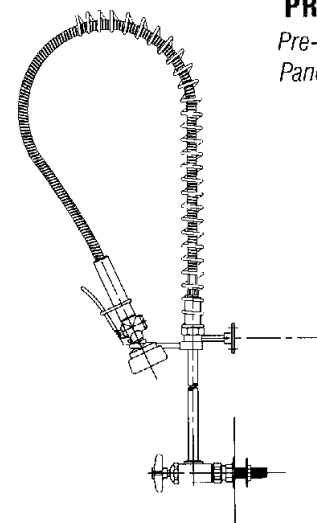

**PR1711WS**

*Pre-Rinse Unit,  
Panel Mounted*

**Application:** Deck mounted pre-rinse spray unit. May be connected directly to cold or tempered water supply or used with a foot-operated valve (see page 14).

**Spray Head:** Chrome plated forged brass spray-type outlet head with rubber collar.

**Valve:** Chrome plated forged brass squeeze valve with insulated handle and locking ring.

**Hose:** 8 ft. reinforced PVC hose. 300 PSI maximum rated working pressure.


**Mounting:** Nylon deck flange for countertop mounting.

**Inlet:** 3/8" IPS male swivel-type inlet.

**Quality Assurance:** Pre-rinse unit is fully assembled and factory tested prior to shipment.

### ADDITIONAL MODEL

**PR1020FSH** Same as above except with 8 ft. stainless steel hose.

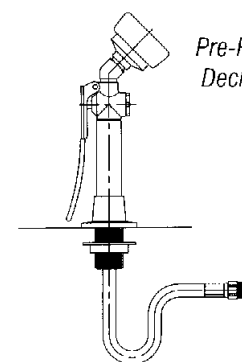

**PR1020**

*Pre-Rinse Unit,  
Deck Mounted*

### Options for Pre-Rinse Units

**Vacuum Breaker.** L110 in-line vacuum breaker installed between squeeze valve and spray head (add suffix "110").

**Handles.** 4" wrist blade handles in place of four-arm handles (add suffix "BH"). Lever handles in place of four-arm handles (add suffix "LE").



**The Parts Hotline**  
**1-800-WSF-PART**

312.666.5500 Voice  
312.666.8597 Fax  
info@wsflab.com

**WaterSaver**  
Chicago, Illinois, USA.